


250 V AC

50/60 Hz

16 A



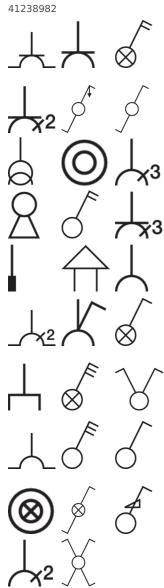

SCHUKO soc. out., enhncd contact prot., screw-in lift terminals, S.1, white gl.

Technical properties

Δ	rc	h	it	0	cti	ire

Architecture	
Design	according to DIN 49440
Fixing mode	flush-mounting
Configuration	
Number of modules	1
Main electrical features	
Nominal voltage	250 V

Electric current

Rated voltage

Rated current

Frequency

Rated current 16 A

Dimensions

Insertion depth 32 mm
Installation depth, flush-mounted boxes 31 mm

Cover, door

Cover Central cover plate

Materials

Colour of design line	white
Colour	white
Colour	white
RAL colour	RAL 1013 - Oyster white
Material	duroplastic
Metallic colour	No

Installation, mounting

Installation mode with spreader claws

Connection

Connection terminals	according to IEC 60884-1
Connection terminals	according to VDE 0620-1
Type of connection	with screw-in lift terminals

Use

Differentiation characteristic 2 - Sales w	with enhanced touch protection
--	--------------------------------

Differentiation characteristic 3 - Sales	Screw-in lift terminals	
Safety		
IK protection code against mecanical impacts	02	
Protection index IP	IP20	
Protection	Enhanced contact protection	
With enhanced contact protection	Yes	

Ide	ant	ific	ation	2

Main design line	Berker S.1/B.3/B.7
Secondary design line(s)	Berker S.1, Berker B.3, Berker B.7