


3036

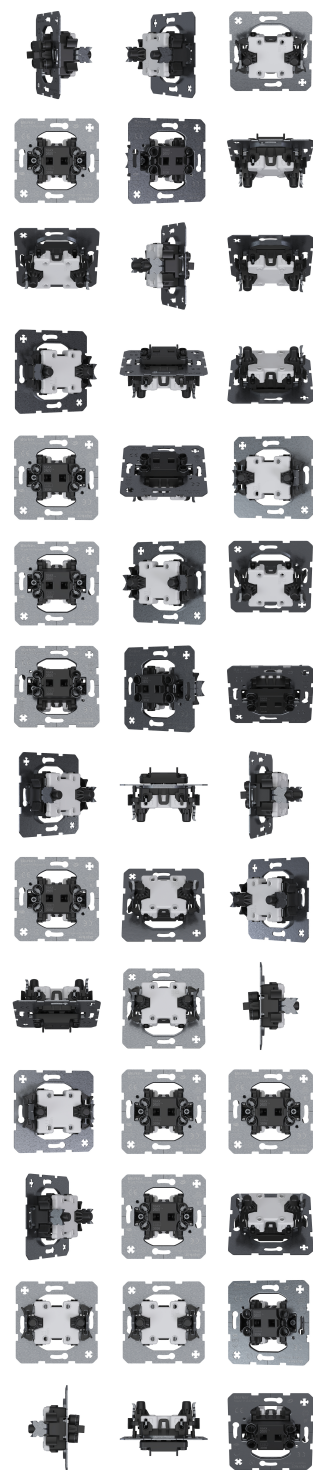

## Change-over switch 10AX 250V~, Light control

### Technical characteristics

#### Architecture

Type of control unit	single rocker
----------------------	---------------

#### Functions

Switching angle	3.5 °
-----------------	-------

#### Configuration

Switch mode	Off/change-over
-------------	-----------------

Antibacterial treatment	No
-------------------------	----

#### Compatibility

IFTTT support available	No
-------------------------	----

#### Controls and indicators

Push-buttons	No
--------------	----

#### Main electrical features

Nominal voltage	250 V
-----------------	-------

Rated voltage	250 V AC
---------------	----------

Frequency	50/60 Hz
-----------	----------

#### Electric current

Switching current	10 AX (100 W Self Ballasted Lamp (SBL))
-------------------	---

#### Dimensions

Depth	41.6 mm
-------	---------

Insertion depth	31 mm
-----------------	-------

Height	71 mm
--------	-------

Width	71 mm
-------	-------

#### Materials

Surface appearance	mat
--------------------	-----

#### Installation, mounting

Installation mode	with spreader claws ; for screw fastening
-------------------	---


#### Connection

Connection terminals	according to IEC 60669-1
----------------------	--------------------------

Connection terminals	according to VDE 0632-1
----------------------	-------------------------

Type of connection	with plug-in terminals
--------------------	------------------------

Type of connection	Quickconnect
--------------------	--------------



Equipment

Lighting	for lighting and monitoring circuit
Heating switch	No

Use cases

Application	Barrier-free application ; HVAC-control ; Light control
-------------	---

Safety

REACH conform	No
RoHS conform	Yes
Halogen free	Yes
Impact strength	IK07

Identification

Application, usage	HVAC control ; Light control
Appliance switch type	No
Main design line	Light control

Instructions

Special note text	A control change-over switch is shown here as an example. With 2-pole and 3-pole control on/off switches, other rocker switches and neon lamp units are required.
Information text	spreader claws, insulated to the supporting ring, self-resetting